



BK12-150G

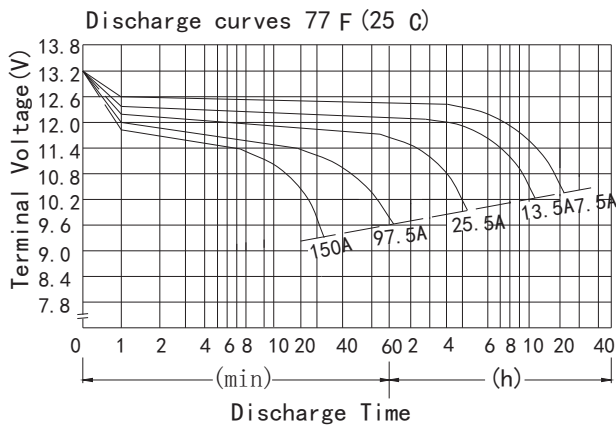

Discharge Current and Discharge Duration Time

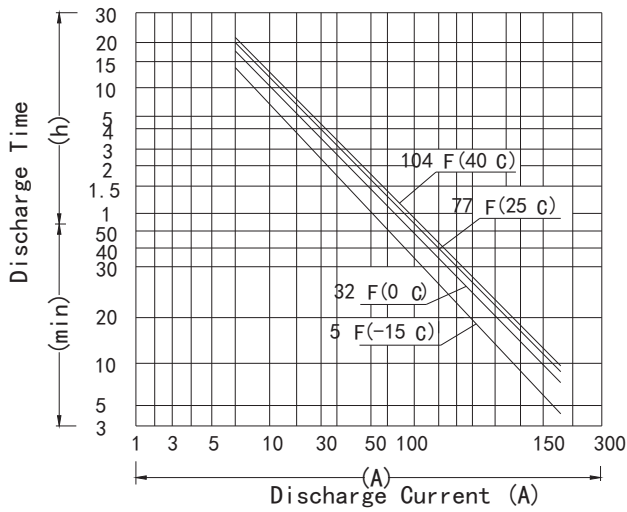

Specification

Nominal Voltage	12V	
Rated Capacity (20hr Rate)	150Ah	
Dimensions	Length	19.09inches (485mm)
	Width	6.69inches (170mm)
	Height	9.21inches (234mm)
	Total Height	9.49inches (241mm)
Weight	Approx. 96.69lbs (43.95kg)	
Characteristics		
Capacity 77°F(25°C)	20hour rate (7.5A)	150Ah
	10hour rate (13.5A)	138Ah
	5hour rate (25.5A)	127.5Ah
	1hour rate (97.5A)	97.5Ah
Internal Resistance	Full Charged, 77°F(25°C)	3mΩ
Capacity Affected By Temperature (10hr Rate)	104°F(40°C)	102%
	77°F(25°C)	100%
	32°F(0°C)	85%
	5°F(-15°C)	65%
Self-Discharge 77°F(25°C)	Capacity after 3 month storage	90%
	Capacity after 6 month storage	80%
	Capacity after 9 month storage	60%
Charge (Constant Voltage)	Initial Charge Current "LESS" than 45.0A	
	Cycle	14.2-14.5V/77°F(25°C)
	Stand By	13.4-13.7V/77°F(25°C)

**These data are average values obtained from three Charge/Discharge cycles. Note: These are NOT minimum values.