




Unit: inch (mm)



BK12-200G

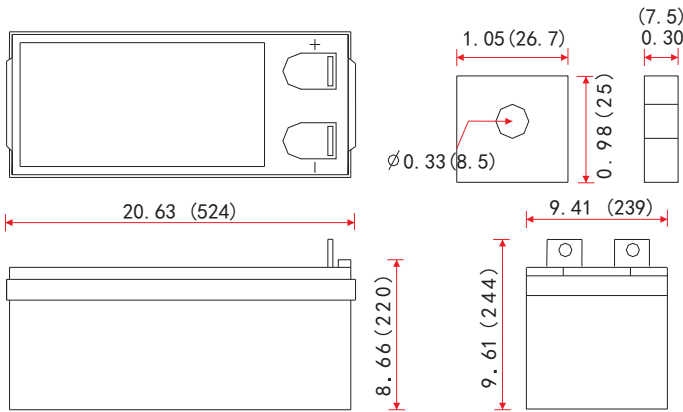

Discharge Current and Discharge Duration Time

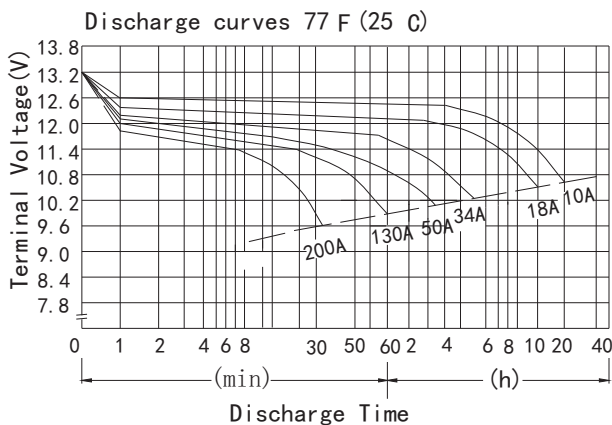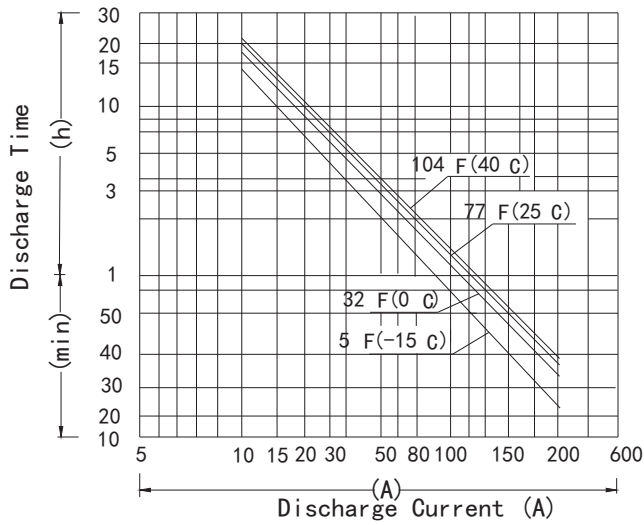

Specification

Nominal Voltage	12V	
Rated Capacity (20hr Rate)	200Ah	
Dimensions	Length	20.63inches (524mm)
	Width	9.41inches (239mm)
	Height	8.66inches (220mm)
	Total Height	9.61inches (244mm)
Weight	Approx. 135.15lbs (61.434kg)	
Characteristics		
Capacity 77°F(25°C)	20hour rate (10A)	200Ah
	10hour rate (18A)	180Ah
	5hour rate (34A)	170Ah
	1hour rate (130A)	130Ah
Internal Resistance	Full Charged, 77°F(25°C)	2.5mΩ
	104°F(40°C)	102%
	77°F(25°C)	100%
	32°F(0°C)	85%
Capacity Affected By Temperature (10hr Rate)	5°F(-15°C)	65%
	Capacity after 3 month storage	90%
	Capacity after 6 month storage	80%
Self-Discharge 77°F(25°C)	Capacity after 9 month storage	60%
	Charge (Constant Voltage)	Initial Charge Current "LESS" than 60A
Cycle		14.2-14.5V/77°F(25°C)
Stand By		13.4-13.7V/77°F(25°C)

**These data are average values obtained from three Charge/Discharge cycles. Note: These are NOT minimum values.