


3-CNFJ-7. 2

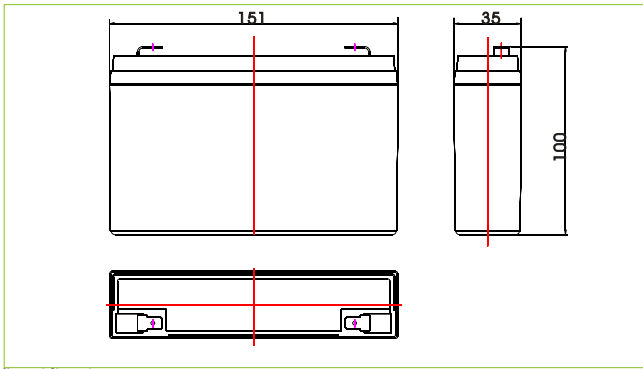


Specifications

Nominal Voltage		6V
Rated Capacity(10 hour rate)		7. 2AH
Dimension	Total Height (with terminals)	100mm(3.94inches)
	Height	94mm(3.7inches)
	Length	151mm(5.94inches)
	Width	35mm(1.38inches)
Weight		Approx. 1.2kg(5.1lbs)


Characteristics

Capacity 77°F(25°C)	120 hour rate (70mA)	8.4AH
	20 hour rate (390mA)	7.8AH
	10 hour rate (720mA)	7. 2AH
Internal Resistance	Full charged Battery 77°F(25°C)	16mΩ
Self - Discharge 77°F(25°C)	Capacity after 3 month storage	95%
	Capacity after 6 month storage	85%
	Capacity after 12 month storage	80%
Max. Discharge Current 77°F(25°C)		72A(5S)
Terminal	Standard	F1
	Optional	F2
Charging (Constant Voltage)	Cycle	Initial Charging Current 2. 2A or small 7.20V~7.40V/77°F(25°C)
	Float	6.75V~6.90V/77°F(25°C)


Terminal (F1)

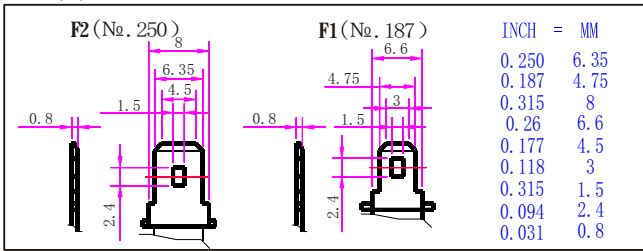

Charge characteristics 77°F(25°C)

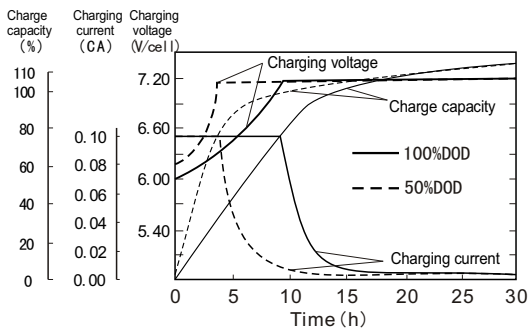


Discharge characteristics 77°F(25°C)

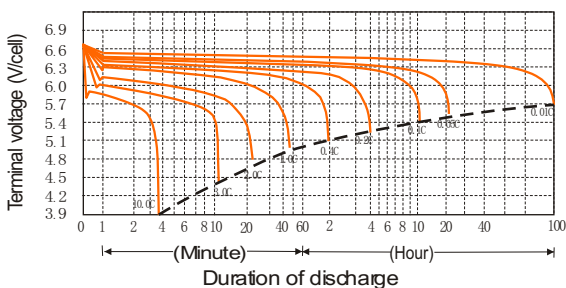


Discharge current and final discharge voltage

Discharge current(A)	Final discharge voltage (V/cell)
0.05C or below or intermittent discharge	5.70
0.05C of current close to it	5.55
0.1C of current close to it	5.40
0.2C of current close to it	5.25
From 0.2C to 0.5C	5.10
From 0.5C to 1C	4.80
From 1C to 3C	4.50
Current in excess of 3C	3.90


Temperature and float service life

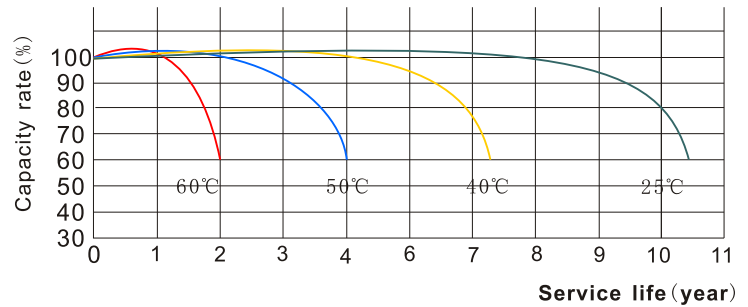


Temperature and discharge capacity

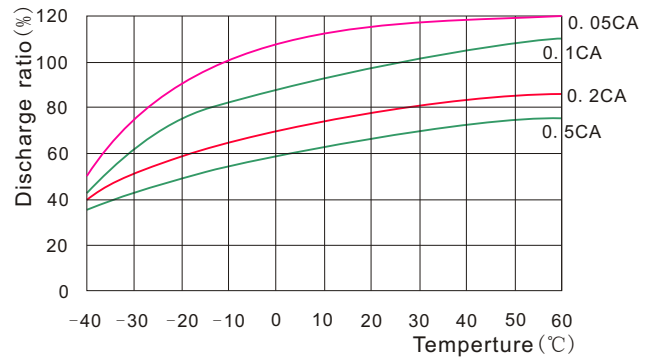

Cycle life curves (25°C)

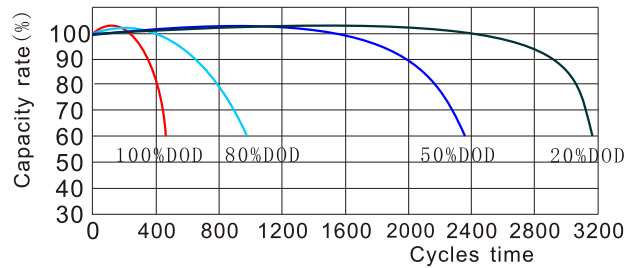

Float service life

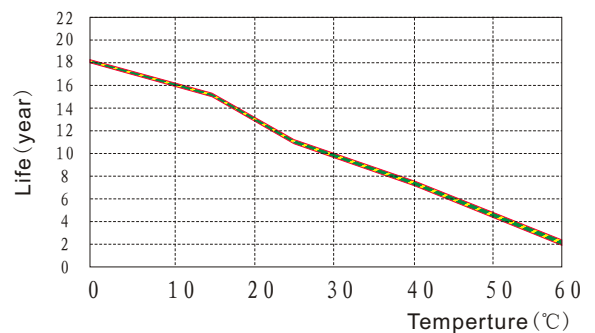

3-CNFJ-7. 2

Constant Current Discharge Characteristics Units: Amperes (25°C, 77°F)

End voltage per cell	5min	15min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	12h	20h	24h
1.60V	26.4	13.9	8.45	6.16	4.95	2.84	2.06	1.62	1.37	1.17	0.89	0.74	0.62	0.41	0.33
1.67V	24.5	13.5	8.32	6.12	4.95	2.83	2.02	1.61	1.36	1.16	0.89	0.74	0.62	0.40	0.33
1.70V	24.3	13.3	8.24	6.03	4.91	2.80	2.01	1.60	1.34	1.15	0.89	0.73	0.62	0.40	0.33
1.75V	22.2	12.9	8.15	5.99	4.82	2.75	2.00	1.58	1.33	1.14	0.89	0.73	0.62	0.40	0.33
1.80V	19.9	12.0	7.82	5.82	4.70	2.71	2.00	1.57	1.31	1.13	0.88	0.72	0.61	0.39	0.33
1.83V	19.1	11.0	7.70	5.62	4.49	2.68	1.92	1.51	1.28	1.09	0.86	0.69	0.59	0.38	0.32
1.85V	17.8	10.7	7.20	5.41	4.36	2.57	1.87	1.49	1.25	1.06	0.83	0.68	0.58	0.38	0.32

Discharge Data with Constant Power Units: Watts per cell (25°C, 77°F)

End voltage per cell	5min	15min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	12h	20h	24h
1.60V	43.9	24.4	15.7	11.5	9.24	5.34	3.88	3.09	2.62	2.24	1.73	1.45	1.21	0.80	0.66
1.67V	41.8	24.0	15.2	11.4	9.23	5.34	3.86	3.09	2.61	2.24	1.73	1.43	1.20	0.80	0.66
1.70V	41.6	23.9	15.1	11.4	9.15	5.30	3.85	3.08	2.57	2.22	1.72	1.43	1.19	0.80	0.66
1.75V	38.7	23.6	15.0	11.3	9.11	5.26	3.84	3.07	2.56	2.21	1.71	1.41	1.19	0.80	0.65
1.80V	35.5	22.4	14.8	11.2	9.07	5.26	3.83	3.06	2.55	2.21	1.70	1.40	1.19	0.78	0.65
1.83V	34.3	20.6	14.6	10.8	8.70	5.22	3.73	2.96	2.52	2.14	1.70	1.34	1.17	0.77	0.65
1.85V	31.8	20.1	13.6	10.4	8.45	5.09	3.62	2.92	2.45	2.09	1.64	1.33	1.15	0.76	0.64